




17'7" X 32'5" BAHAMA

LAYOUT DIMENSIONS

A-B	38'4 ³ / ₄ "	A-1	16'8 ¹ / ₄ "	1-2	14'5"	S1-A	10'9"	S5-A	19'6 ¹ / ₄ "
A-C	45'3 ³ / ₄ "	A-4	16'4 ¹ / ₂ "	1-3	19'3 ³ / ₄ "	S1-D	22'10 ³ / ₄ "	S5-D	24'9 ³ / ₄ "
B-C	23'7 ¹ / ₄ "	B-2	16'11 ³ / ₄ "	1-4	16'	S2-A	22'10 ¹ / ₂ "	S6-A	25'1 ¹ / ₂ "
		B-4	22'10"	2-3	16'	S2-D	10'9"	S6-D	19'4 ¹ / ₄ "
		C-2	16'8 ¹ / ₄ "	2-4	19'3 ³ / ₄ "	S3-B	22'10 ³ / ₄ "	S7-B	24'9 ³ / ₄ "
		C-3	16'4 ¹ / ₂ "			S3-C	10'9"	S7-C	19'6 ¹ / ₄ "
		D-1	16'11 ¹ / ₂ "			S4-B	10'9"	S8-B	19'4 ¹ / ₄ "
		D-3	22'10"			S4-C	22'10 ¹ / ₂ "	S8-C	25'1 ¹ / ₂ "

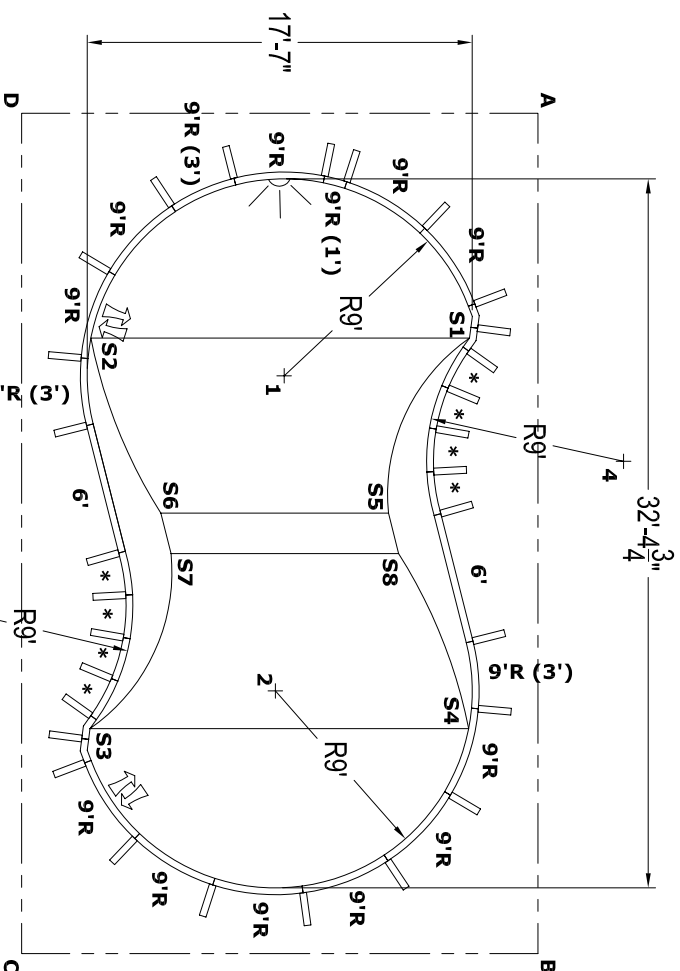

GENERAL NOTES

1. These are finished dimensions ready for the liner.
2. Dimensions are from inside pool panels.
3. The ideal water level should be to the middle of the skimmer opening(s).

EXCAVATION NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See Overdig Detail for excavation around pool.
5. Fill voids under base of panels and ramp well.
6. Backfill with non-expansive material.


ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. The dealer or contractor who sells or installs your pool is an independent contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/contractor.

DIMENSIONS

A	17'7"	K	11'0"
B	32'4 ³ / ₄ "	L	8'
D	3'4"	M	7'3 ¹ / ₄ "
E	2'8"	M2	7'3 ¹ / ₄ "
F	6'	T	-
G	VAR	S	-
H	2'	N	-
I	2'	P	-
J	8'	U	-


APSP TYPE	0	SQ. FOOTAGE	570
PERIMETER	86'8"	GALLONS	13104



BILL OF MATERIALS

QTY	PART	DESCRIPTION
2	HP106	6' PANEL
8	HP159	9' R PANEL
1	HP159LL	9' R PANEL (LIGHT)
2	HP159A	9' R PANEL (A/G)
3	HP125	(9' R) 3' ROMAN INSERT
1	HP115	(9' R) 1' OVAL INSERT
8	HP119N	9' R REVERSE (*)
4	HP121	30" LAZY-ELL PANEL
29	HP199	BRACE

OVERDIG DETAIL

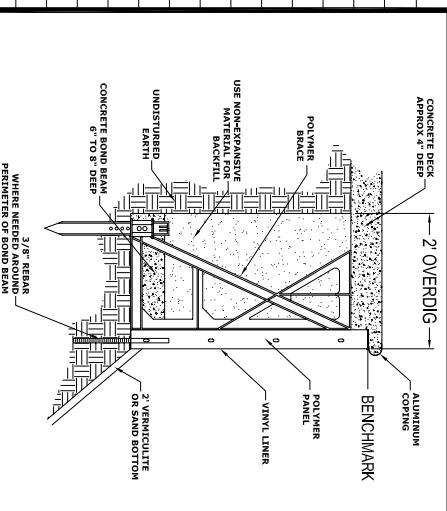

COPING LAYOUT

*NOTE: REFER TO INSTALLATION MANUAL FOR MORE INFO.

NO DIVING WARNING



ATTENTION DEALER/BUILDER: It is your responsibility to ensure the safety package provided is delivered to the pool owner and that the "NO DIVING" labels are properly installed.

NO DIVING WARNING LABELS MUST BE INSTALLED IN NO DIVING AREAS ACCORDING NSPI SPECIFICATIONS



* SUGGESTED LABEL LOCATIONS ARE SPECIFIED IN THE COPING LAYOUT

PRE-CUT PANEL LEGEND

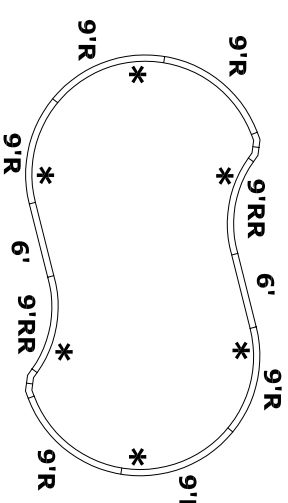

GENERAL NOTES

1. Rough excavation should be 2" deeper in each instance.
2. Soil to have minimum bearing capacity of 2000 P.S.F.
3. Locate top of pool at least 6" above surrounding land elevation.
4. See Overdig Detail for excavation around pool.
5. Fill voids under base of panels and ramp well.
6. Backfill with non-expansive material.

ADDITIONAL NOTES

THIS DOCUMENT IS FOR ILLUSTRATIVE PURPOSES ONLY. The dealer or contractor who sells or installs your pool is an independent contractor and is not an agent of the Manufacturer. The construction methods illustrated here are suggestions and apply only to normal ground conditions. There may be additional precautions and/or methods of construction. Proper installation is the responsibility of the dealer/contractor.