

# Above Ground POOL FROG® System Instruction Manual



**System Includes the  
Patented Mineral Pool  
Disinfectant**

Customer Service 800-222-0169  
[www.kingtechnology.com](http://www.kingtechnology.com)

# TABLE OF CONTENTS

<b>POOL FROG® Introduction</b>	<b>3</b>
<b>Swimming Pool Tips</b>	<b>4</b>
<b>Start-up and Operation</b>	<b>5-6</b>
<b>Replacing POOL FROG® Mineral Reservoir</b>	<b>7</b>
<b>Using FROG BAM®</b>	<b>8</b>
<b>Using POOL FROG® Bac Pac</b>	<b>9</b>
<b>Troubleshooting</b>	<b>10</b>
<b>Parts List</b>	<b>11</b>
<b>Replacing Control Dial O-Rings</b>	<b>12</b>
<b>Replacing Cap O-Rings and Knobs</b>	<b>12</b>
<b>Winterizing</b>	<b>13</b>
<b>Above Ground Filter Installation</b>	<b>14</b>
<b>Above Ground Base Installation</b>	<b>15</b>
<b>Warranty</b>	<b>16</b>

**For information on King Technology's entire product line, visit our website at [www.kingtechnology.com](http://www.kingtechnology.com)**

# POOL FROG®

Welcome to easier pool care courtesy of POOL FROG®. With POOL FROG®, your pool water will look and feel better without a lot of work or a lot of chlorine. This system controls bacteria using a combination of minerals and reduced chlorine levels—up to 50%\* less. There are 4 parts to the POOL FROG® System: The Above Ground POOL FROG® Cycler, the POOL FROG® Mineral Reservoir, FROG BAM® 90-day Algae Preventative and the POOL FROG® Bac Pac.

## Part 1 POOL FROG® Cycler

The water treatment center that controls the flow of water to each part of the POOL FROG® System.



For Above Ground Pools  
up to 25,000 gallons.

## Part 2 POOL FROG® Mineral Reservoir

Holds the minerals and fits inside the POOL FROG® Cycler.



THE POOL FROG®  
MINERAL RESERVOIR  
MUST BE REPLACED  
EVERY SIX MONTHS  
OR AFTER ONE POOL  
SEASON WHICHEVER  
IS SHORTER.

## Part 3 FROG BAM®

Use with the POOL FROG® System for an Algae-Protection Guarantee.



## Part 4 POOL FROG® Bac Pac

Pre-filled with chlorine tablets and fits inside the POOL FROG® Mineral Reservoir.



POOL FROG® Mineral Reservoir sold inside POOL FROG® Mineral Cycler and separately for replacements.  
POOL FROG® Bac Pac and FROG BAM® sold separately.

\*Compared to the minimum EPA recommended chlorine level of 1.0 ppm for a stabilized swimming pool.

# Swimming Pool Tips

## Start-up and Yearly Maintenance

1.



Make sure the pool has adequate circulation. The pool water must completely circulate through the pump and filter at least 1 to 2 times per day. This usually requires 8 to 12 hours. Check with your dealer for the proper circulation time for your pool.

2.

Before beginning with any pool care program, you must first balance your pool water. Take a water sample to your local pool professional or use a complete test kit that will test for the following important elements.

### Water Balance Guidelines

pH:	7.2 - 7.8
Total Alkalinity:	60 - 120 ppm
Calcium Hardness:	150 - 400
Total Dissolved Solids:	<1500
Stabilizer:	20 - 80 ppm
Free Chlorine:	0.5 - 1.0 ppm

3.

Cu  
Mg Fe


If your fill water is high in metals, use a sequestering agent or metal out product at start-up only before using the POOL FROG® Mineral Reservoir. See your local dealer for details on using these products and always follow manufacturers directions carefully.

4.



After your pool is up and running smoothly, continue to test your water for pH, total alkalinity and chlorine and maintain its balance by adding any necessary adjustment products (see your dealer for details).

5.




Check the pool's filter gauge often and periodically clean filter per the manufacturer's directions. A dirty filter will slow the flow of water which could hamper proper circulation.

# Start-up and Operation



Add a stabilizer or conditioner to the pool at the beginning of the season if the stabilizer level is below 20 ppm. This will prevent chlorine burn off. Follow manufacturer's directions carefully.




Shock the pool with chlorine to rid the water of all contaminants before beginning with POOL FROG®. Follow manufacturer's directions carefully.

**THIS STEP IS VERY IMPORTANT TO START-UP.  
USE CHLORINE SHOCK ONLY.**




## WARNING

Do not add shock in or near the skimmer or into the POOL FROG® Cyclor as it could damage equipment, risk potential explosion or discolor your pool surface.

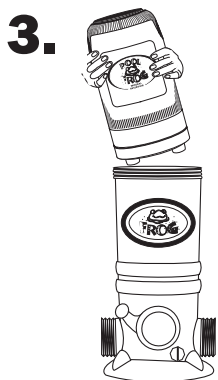


Install a POOL FROG® Mineral Reservoir into the POOL FROG® Cyclor. (Follow directions on page 7.)

**REPLACE THE POOL FROG® MINERAL RESERVOIR EVERY 6 MONTHS OR AFTER ONE POOL SEASON WHICHEVER IS SHORTER.**



Replace cap and run POOL FROG® Cyclor, with POOL FROG® Mineral Reservoir inserted, for 10 minutes on Setting 5.

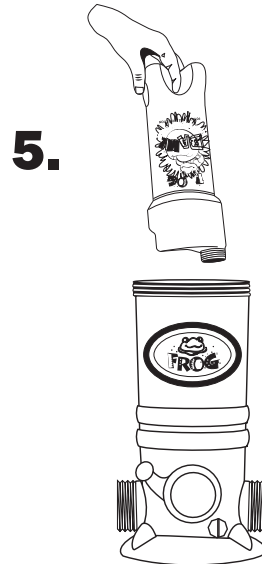

For an Algae Protection Guarantee insert FROG BAM® into POOL FROG® Mineral Reservoir in POOL FROG® Cyclor. (Follow directions on page 8.)



When chlorine reading is down to 1.0 ppm, which may take a few days, insert POOL FROG® Bac Pac. (Follow directions on page 9.)

# Start-up and Operation

- 7.** Set control dial by matching up the parameters of your pool on the chart below. THIS IS A STARTING POINT ONLY and may need to be adjusted to fit your individual pool needs. See #8 below for directions. **IMPORTANT:** Pump run times less than 8 hours could result in under chlorination due to inadequate flow through the System.

Above Grd. POOL SIZE		8 Hour Pump Run Time				12 Hour Pump Run Time				24 Hour Pump Run Time			
		PUMP SIZE				PUMP SIZE				PUMP SIZE			
Gallons	Diameter	1/2 hp	3/4 hp	1 hp	1 1/2 hp	1/2 hp	3/4 hp	1 hp	1 1/2 hp	1/2 hp	3/4 hp	1 hp	1 1/2 hp
7,000	(18')	5	4.5	4	3.5	4.5	4	3	*5	3.5	3	2.5	* 4
9,000	(21')	5.5	5	4.5	4	5	4.5	4	* 5.5	4	3.5	3	* 4.5
12,000	(24')	6	5.5	5	4.5	5.5	5	4.5	4	4.5	4	3.5	5
15,000		NR	6	5.5	5	6	5.5	5	4.5	5	4.5	4	3.5
20,000		NR	NR	6	5.5	NR	6	5.5	5	5.5	5	4.5	4

\* – Bypass installation recommended.  
NR – This pump size is not recommended for this size pool.

RECOMMENDED FLOW RATE: 20-60 gpm  
Most common pool sizes

Find your starting dial setting by matching up the parameters of your pool on the above chart. An above ground pool with approximately 12,000 gallons with a 1 horse pump running 12 hours a day would require a starting setting of 4.5. See example at right.

Above Grd. POOL SIZE		8 Hour Pump Run Time				12 Hour Pump Run Time			
		PUMP SIZE				PUMP SIZE			
Gallons	Diameter	1/2 hp	3/4 hp	1 hp	1 1/2 hp	1/2 hp	3/4 hp	1 hp	1 1/2 hp
7,000	(18')	5	4.5	4	3.5	4.5	4	3	*
9,000	(21')	5.5	5	4.5	4	5	4.5	4	*
12,000	(24')	6	5.5	5	4.5	5.5	5	4.5	4.5
15,000		NR	6	5.5	5	6	5.5	5	*
20,000		NR	NR	6	5.5	NR	6	5.5	*

- 8.** For the first week test the pool water daily for free chlorine to ensure correct dial setting. Continue to test weekly throughout the season.



After each testing, adjust the dial up by 1/2 increment if the free chlorine reading has dropped below 0.5 ppm or adjust down by 1/2 increment if the reading has risen above 1.0 ppm. Continue this process each day until the free chlorine reading stabilizes to at least 0.5 ppm.

Remember to adjust dial by 1/2 increments only in order to prevent over chlorination which may bleach pool surfaces.

- 9.** Shock pool every two weeks or as needed to maintain water quality. Follow label directions on the shock treatment used.




### WARNING

Do not add shock in or near the skimmer or into the POOL FROG® Cycler as it could damage equipment, risk potential explosion or discolor your pool surface.

- If using another means of chlorine support, follow steps 1-5 on page 5 then continue below.**

**6.**



Set dial to Setting 5. Maintain a minimum chlorine reading of 0.5 ppm with a chlorine delivery device or hand feeding.

**7.**



Shock pool every two weeks or as needed to maintain water quality. Follow label directions on the shock treatment used.




### WARNING

Do not add shock in or near the skimmer or into the POOL FROG® Cycler as it could damage equipment, risk potential explosion or discolor your pool surface.

# Replacing a POOL FROG® Mineral Reservoir

(POOL FROG Mineral Reservoirs **MUST** be Replaced Every Season)



**1.** IN GROUND SERIES 5400 (Order #01-12-5462)  
**NOW FITS THE FOLLOWING CYCLERS:**  
POOL FROG Series 5400 or 5600  
Prevail Series 5790

Check the top of the box and back label of product to make sure you have the correct POOL FROG® Mineral Reservoir to fit your POOL FROG® Cycler.

**THE POOL FROG® MINERAL RESERVOIR MUST BE REPLACED EVERY 6 MONTHS OR AFTER ONE POOL SEASON WHICHEVER IS SHORTER.**

**2.** **PULL OUT AND READ**


**IMPORTANT:** Remove and read the information card.

Please note: Complete instructions for inserting a POOL FROG® Mineral Reservoir, FROG BAM® and POOL FROG® Bac Pac are included inside the POOL FROG® Mineral Reservoir.


**3.**

**WARNING**


USE ONLY the factory recommended replacement POOL FROG® Mineral Reservoir, FROG BAM® and POOL FROG® Bac Pac. DO NOT USE any other pac or bulk chemical tablets in the POOL FROG® Cycler. Use of any other product could result in damage to pool equipment or surface, unsafe pool conditions, fire or explosion. Warranty will be void if the correct POOL FROG® Mineral Reservoir, FROG BAM® and POOL FROG® Bac Pac are not used.



Turn off pump and turn dial to Setting 0. This reduces the flow of water into the unit when the cap is open.

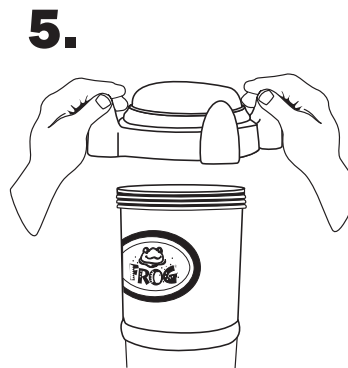

Open cap. If using POOL FROG® Bac Pac stand back to avoid inhaling chlorine fumes.

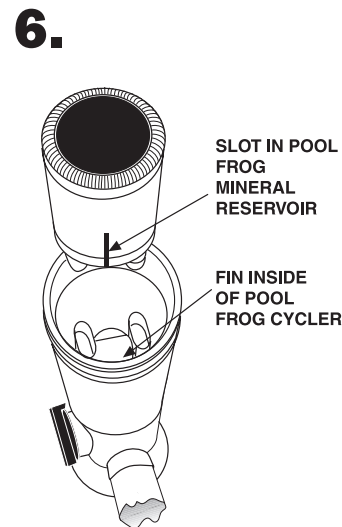

Find slot on side of POOL FROG® Mineral Reservoir and line up with fin inside the POOL FROG® Cycler. Lower POOL FROG® Mineral Reservoir into POOL FROG® Cycler until secure.


# Using FROG BAM® for an Algae Protection Guarantee

If you are not using FROG BAM®, proceed to Step 15.  
See FROG BAM® product labeling for complete directions for use (EPA Reg. No. 53735-9).


For a preventive dose add:

- One FROG BAM® for pools up to 15,000 gallons.
- Two FROG BAM® for pools between 15,000 and 30,000 gallons.

**\*NOTE:** Do NOT super chlorinate 48 hours before or after using this product. Avoid using other chemicals until this product has been circulated (filtered) for at least 24 hours.

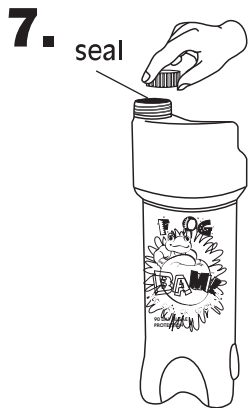

Remove cap from FROG BAM® without removing seal.

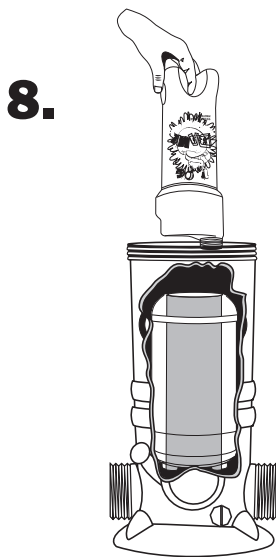


Insert upside down into center of POOL FROG® Mineral Reservoir pushing down firmly on key to puncture seal.



Replace cap by hand only. **DO NOT OVER TIGHTEN.**




Turn control dial on POOL FROG® Cycler to Setting 5.



Turn pump on for 90 minutes allowing FROG BAM® to circulate through pool.



To remove FROG BAM®, turn pump off. Turn dial to Setting 0.



Remove POOL FROG® Cycler cap.



Lift FROG BAM® up and allow any water in the container to drain through the POOL FROG® Cycler before discarding in trash.

**NOTE:** If water shows more than a hint of blue inside POOL FROG® Cycler, replace the POOL FROG® Cycler cap, turn dial to Setting 5 and run the pump for one minute.

14a. If pool size requires additional FROG BAM®, repeat steps 7-14.

14b. When water is clear in POOL FROG® Cycler, proceed to step 15.



# Using the POOL FROG® Bac Pac



**WARNING** – USE ONLY the factory recommended replacement POOL FROG® Bac Pac. (See label.) DO NOT USE any other pac or bulk chemical tablets in the POOL FROG® Cycler. Use of any other product could result in over chlorination, bleached liners, unsafe pool conditions, fire or explosion. Warranty will be void if the correct pac is not used.

## 15. Colored caps



POOL FROG® Bac Pac recommended to assure up to 50% reduction in chlorine use\*. POOL FROG® Bac Pac sold separately. (EPA Reg. No. 53735-2)


*\*Compared to the minimum EPA recommended chlorine level of 1.0 ppm for a stabilized swimming pool.*

## 16.




Avoid sparks, open flame or smoking when handling the POOL FROG® Bac Pac.

## 17.

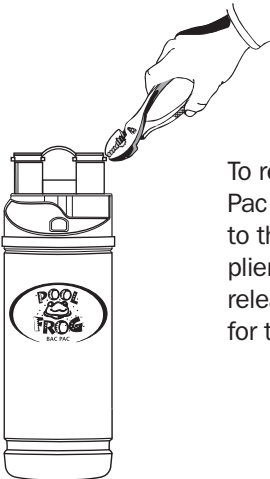


To remove POOL FROG® Bac Pac colored caps, grab on to the lip of one cap with a pliers and pull up until cap releases. Repeat the process for the other cap.

## 18.

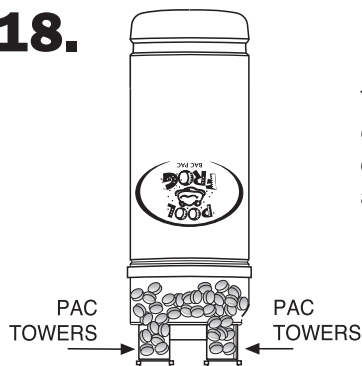


Turn POOL FROG® Bac Pac over and shake slightly until chlorine tablets fall into tower areas.

## 19.

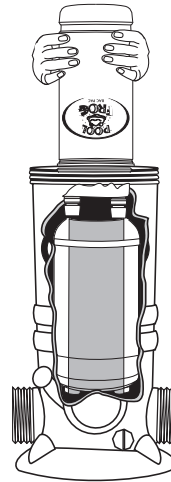

Line up the small leg of the POOL FROG® Bac Pac with the small opening in the POOL FROG® Mineral Reservoir and the large leg with the large opening. Lower POOL FROG® Bac Pac into POOL FROG® Mineral Reservoir until secure.



## 20.



Replace cap by hand only. DO NOT OVER TIGHTEN.



The chlorine pacs are made of HDPE plastic. Non-refillable container. Do not reuse or refill this container. Offer for recycling if available. Rinse thoroughly before recycling or discarding in trash.

## 21.




Mark your calendar for the six month replacement of the POOL FROG® Mineral Reservoir, 90-day replacement of FROG BAM® and approximate replacement times for the POOL FROG® Bac Pac. Once wetted, the time-released mineral coating of the POOL FROG® Mineral Reservoir is effective up to 6 consecutive months or one pool season whichever is shorter. After that time, even if you hear the spent media inside, it is no longer effective and must be replaced.

# Troubleshooting

For more in-depth troubleshooting, go to [www.kingtechnology.com](http://www.kingtechnology.com)

Problem	Remedy		
<p><b>1. What do I do if the water looks cloudy?</b></p>	<p>1. Make sure your filtration system is working properly (i.e. clean filter, skimmer and pump basket).</p> <p>2. Make sure circulation time is adequate – increase pump</p>	<p>time if not.</p> <p>3. Make sure the pool is properly balanced (see page 4).</p> <p>4. Shock the water to eliminate build up of any organic matter.</p>	<p>5. Make sure pool has a free chlorine reading of 0.5 to 1.0 ppm.</p> <p>6. Check with your dealer for more information.</p>
<p><b>2. What do I do if the water turns color?</b></p>	<p>1. Metals in the fill water may have been oxidized. Have the pool tested. Shock the pool and clean the filter until water clarity returns.</p>	<p>2. Algae may be trying to form – shock the pool, increase circulation time if needed and clean the filter.</p>	<p>3. Check with your dealer for more information.</p>
<p><b>3. What do I do if algae forms in or on my pool?</b></p>	<p>1. Use a nonmetallic (polyquat) algaecide per the directions on the bottle and brush the sides of the pool often.</p>	<p>2. Clean the filter and shock the pool with chlorine daily until water clarity returns.</p> <p>3. If you are in an area of the country that struggles with algae growth, see your dealer regarding a 90-day Algae</p>	<p>Protection Guarantee using FROG BAM® . <b>See product hang tag for guarantee details.</b></p> <p>4. Check with your dealer for more information.</p>
<p><b>4. What do I do if I am under chlorinating with the POOL FROG® Bac Pac?</b></p>	<p>1. If you are unable to maintain 0.5 to 1.0 ppm, first make sure there are chlorine tablets in the tower areas of the POOL FROG® Bac Pac and it is installed properly. If a correction was made, test the water in 24 hours.</p> <p>2. If still low, turn the dial up one setting and test the water again in 24 hours. Continue raising the setting by one increment each day</p>	<p>until the proper reading is achieved.</p> <p>3. Shock the pool if the reading has been lower than 0.5 ppm for more than one day.</p> <p>4. Make sure pump run time is at least 6 hours on high speed (40 gpm or higher) or if not, bleed the air from the back knob each time cap is open.</p>	<p>5. Contact your dealer to have your back pressure tested to ensure it is at least 4 psi.</p> <p>6. Check for a suction side leak by looking for air bubbles in your pump basket or at the return jet. Contact dealer for help in correcting this situation.</p> <p>7. Contact King Technology's Customer Service Department at 800-222-0169.</p>
<p><b>5. What do I do if I am over chlorinating with the POOL FROG® Bac Pac?</b></p>	<p>1. If the chlorine reading is over 3.0 ppm, remove the POOL FROG® Bac Pac from the POOL FROG® Mineral Reservoir and test the water daily until the reading is down to 1.0 ppm.</p> <p>2. Reinsert the POOL FROG® Bac Pac, lower the dial one setting and test the water again in 24 hours. If the</p>	<p>reading has risen, lower the dial one setting again. Continue this process until proper reading is achieved.</p> <p>3. If over-chlorinating at the lowest possible setting, consider decreasing the circulation time. Depending on your pump size, you may be circulating the water more than is necessary.</p>	<p>4. Contact your dealer to have your back pressure tested. If over 8 psi consider a larger eye-ball fitting in the return jet.</p> <p>5. Contact King Technology's Customer Service Department at 800-222-0169.</p>

# Parts List Model 6100/6500

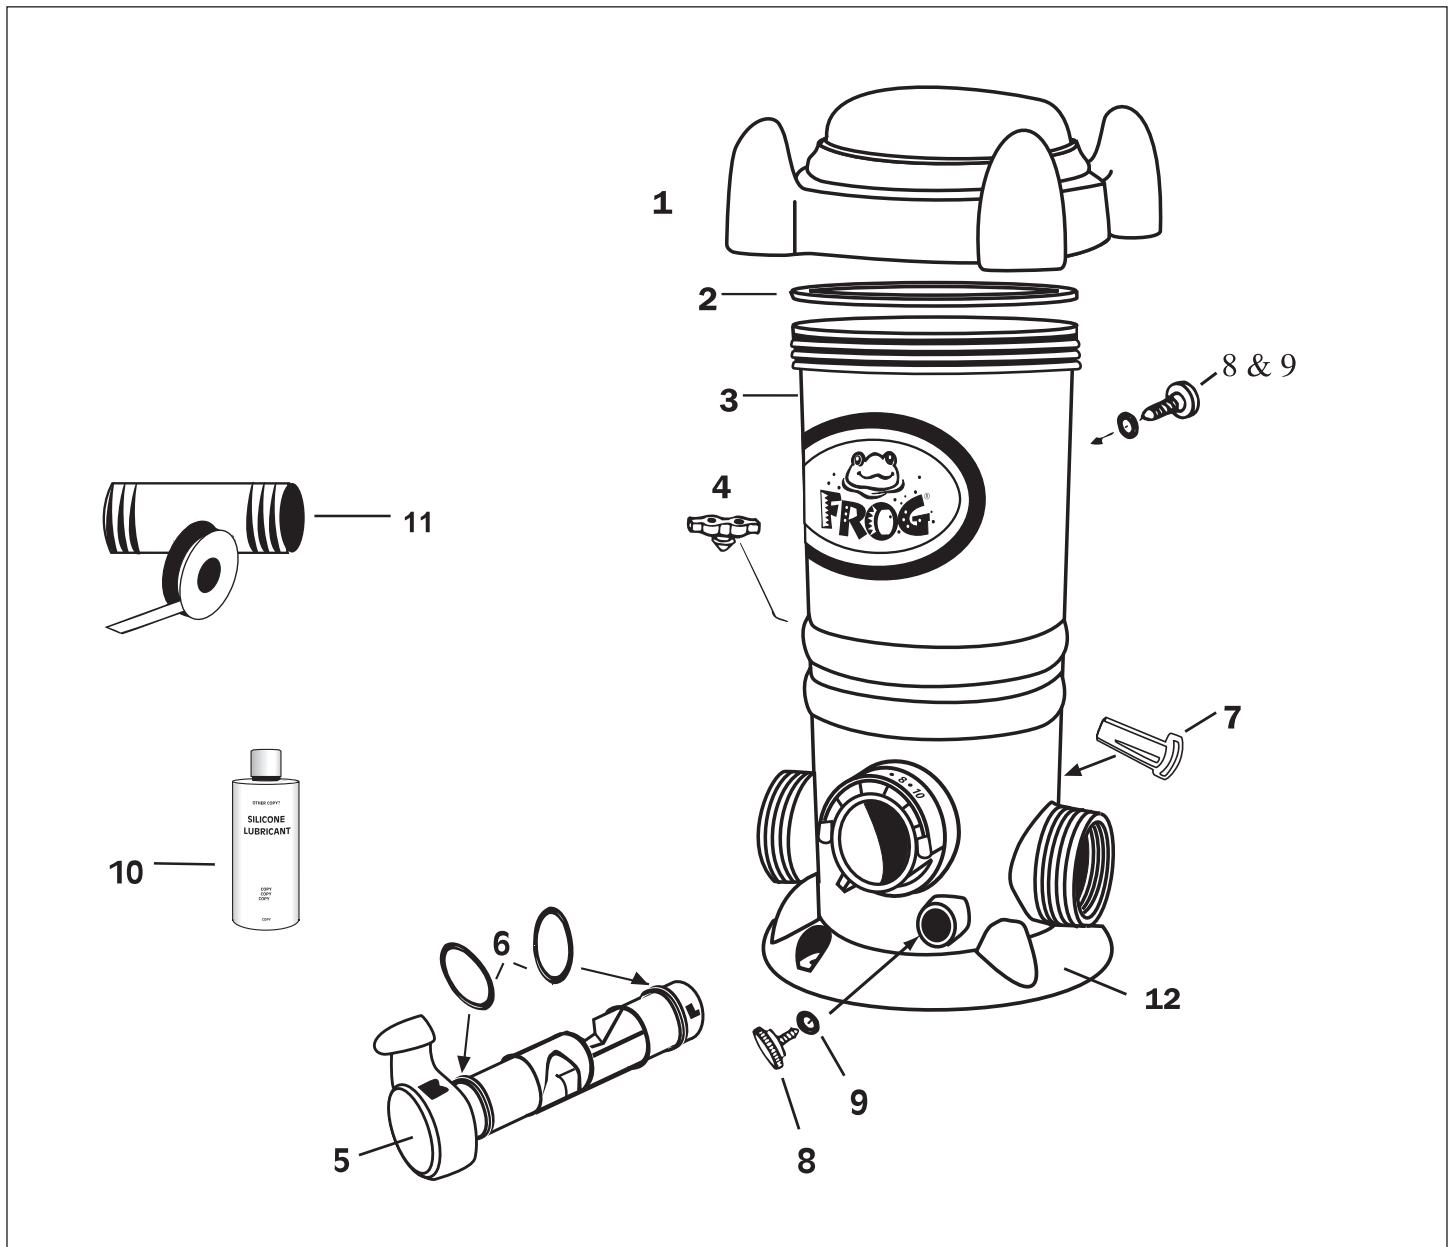

## Included with POOL FROG Cyclers 6100 or 6500


REF. #	DESCRIPTION	QTY. INCLUDED
1 & 2	Cap w/O-Ring	1
3	Body	1
4	Pressure Relief Valve	1
5, 6, 7	Control Dial with O-Rings and Locking Pin	1
8 & 9	Knob with O-Ring	2
10	Silicone Lubricant	1
11	Nipple Kit	1
12	Mounting Base	1

## Replacement parts for POOL FROG Cyclers 6100 or 6500




REF. #	PART NO.	DESCRIPTION
1 & 2	01-22-1418	Cap w/O-Ring
2	01-22-1920	Cap O-Ring
4	01-22-9480	Pressure Relief Valve
5, 6, 7	01-22-1443	Control Dial with O-Rings and Locking Pin
6	01-22-1450	Control Dial O-Ring Set
8 & 9	01-22-9940	Knob with O-Ring
10	01-22-9971	Silicone Lubricant
11	01-22-1710	Nipple Kit
12	01-22-1485	Mounting Base

# POOL FROG® Cyclor Maintenance


## Replacing the Control Dial O-Rings

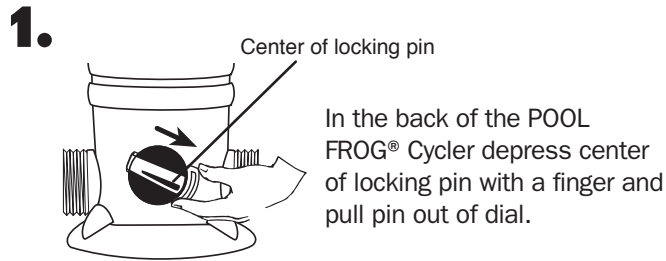


## Replacing Cap O-Ring

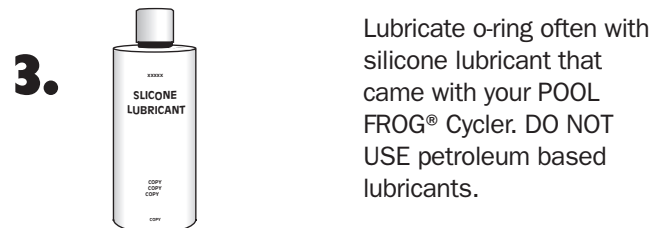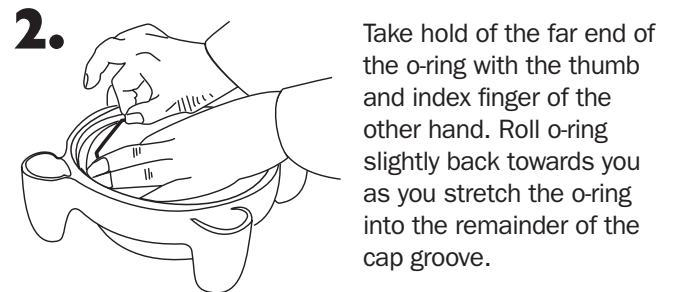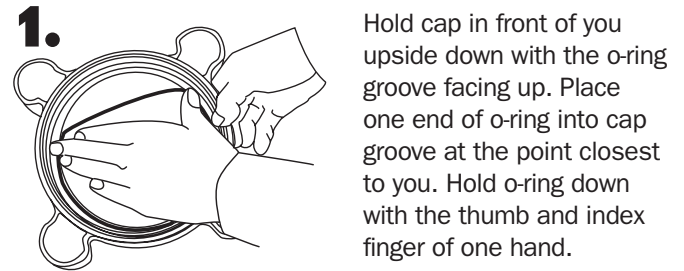

## Replacing Knobs

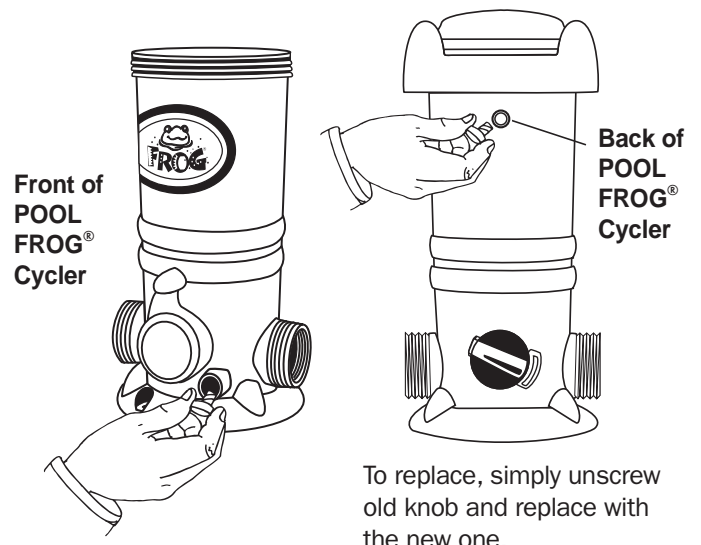


# Winterizing



Turn pump off and turn dial to Setting 0.




Remove cap.

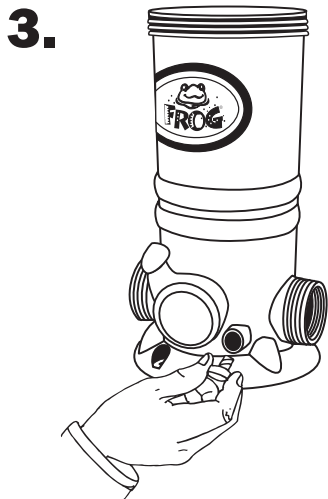

Unscrew knob from the front of POOL FROG® Cyclers. Allow all water to drain.



If POOL FROG® Bac Pac still contains chlorine, wrap in plastic bag and store in shed or cool well-ventilated location away from children, pets, cars, motorcycles or anything metal that can rust, pit, etc. Make sure POOL FROG® Bac Pac is away from open flame.

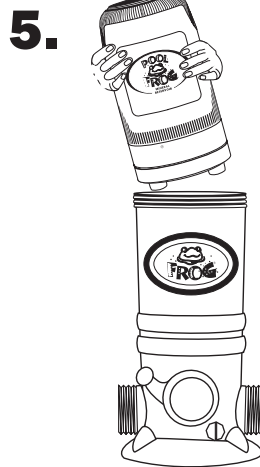

Remove the POOL FROG® Mineral Reservoir and discard in trash. Even if you hear spent minerals inside, it is no longer effective.




Replace the cap and knob loosely.

## TOOLS NEEDED

Screwdriver



Pipe Wrench



## INCLUDED WITH POOL FROG® CYCLER

Pipe Thread Tape or Sealant




One 6" X 1 1/2" TBE PVC Nipple




## MATERIALS NEEDED

One Hose Adapter  
1 1/2" X 1 1/2" X 1 1/4"



One Section of  
1 1/2" Flex Hose  
(provided with filter)



One  
Hose Clamp




## RECOMMENDED

Corrosion Resistant  
Check Valve

# Above Ground, Filter Installation



**1.**

Apply pipe thread tape or sealant to each threaded end of nipple.



**2.**

Screw one end of nipple into the filter return.

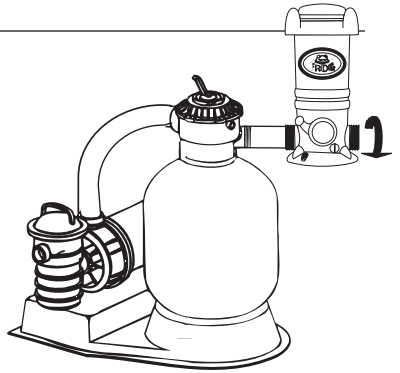

**3.**


Screw either side of POOL FROG® Cyclar on to open nipple end until upright and secure.



Tighten turning  
1 to 2 revolutions with wrench.  
**DO NOT OVER TIGHTEN.**


**4.**

Apply pipe thread tape or sealant to threaded end of hose adapter.




**5.**

Screw adapter into the other side of POOL FROG® Cyclar.  
Hand tighten. Finish tightening by turning 1 to 2 revolutions with wrench.  
**DO NOT OVER TIGHTEN.**

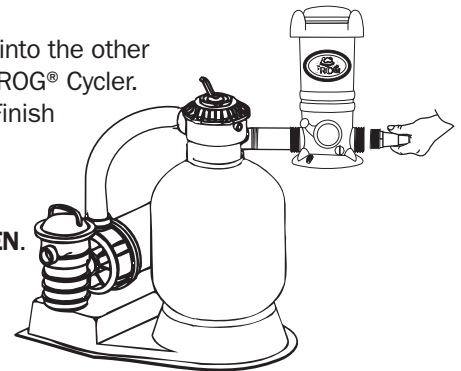


**6.**

Attach return section of hose to the adapter with clamp.  
Tighten clamp with screwdriver.

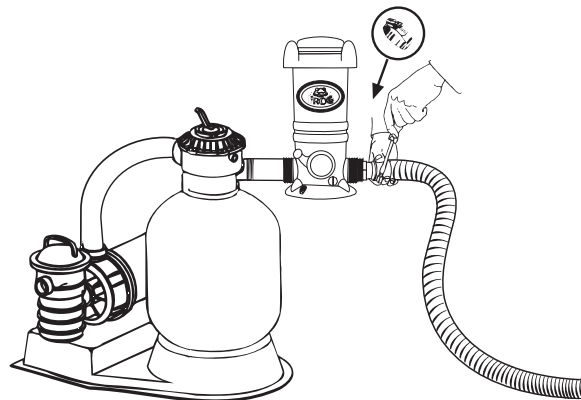

**7.**

If using a POOL FROG® Bac Pac, installing a corrosion resistant check valve is recommended.

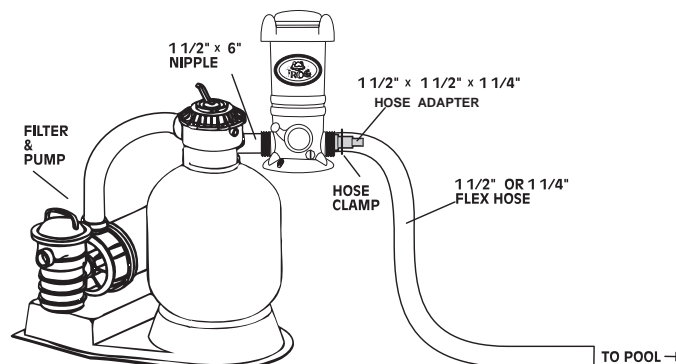


## TOOLS NEEDED

Screwdriver



Pipe Wrench




## Materials Needed


Pipe Thread  
Tape  
or Sealant



One 6" X 1 1/2" TBE  
PVC Nipple



Two Sections  
of 1 1/2" Flex Hose (one  
provided with filter)



Two  
Hose Clamps



## Recommended

Corrosion Resistant  
Check Valve

10 X 1 1/4" Phillips  
Pan Head Screws with  
Washers



## Option

1 1/2" Male Adapter  
(slip x MPT)




or

2" Female Adapter  
(slip x FPT)




When installing with hard  
PVC pipe, use either a  
female adapter on the  
outside port threads or  
a male adapter on the  
inside port threads.

# Above Ground, Base Installation

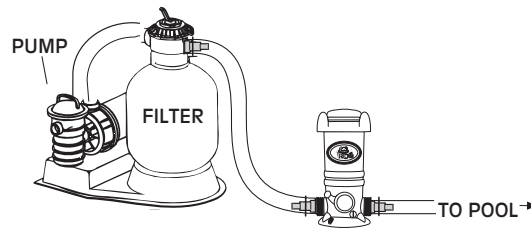


The POOL FROG® Cyclizer should always be installed between the filter and pool (or between heater and pool if applicable).



1. Apply pipe thread tape or sealant to the threaded end of both hose adapters.



2. Screw adapters into each end of POOL FROG® Cyclizer. Hand tighten. Finish tightening by turning 1 to 2 revolutions with wrench. **DO NOT OVER TIGHTEN.**

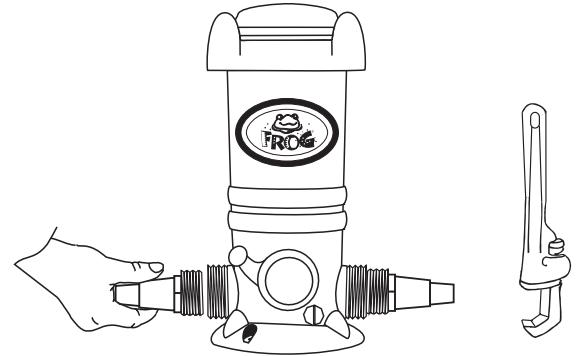


3. Attach the filter section of flex hose to one hose adapter and the return section of flex hose to the other hose adapter with clamps and tighten with screwdriver. Bi-flow valve design allows water flow in either direction.

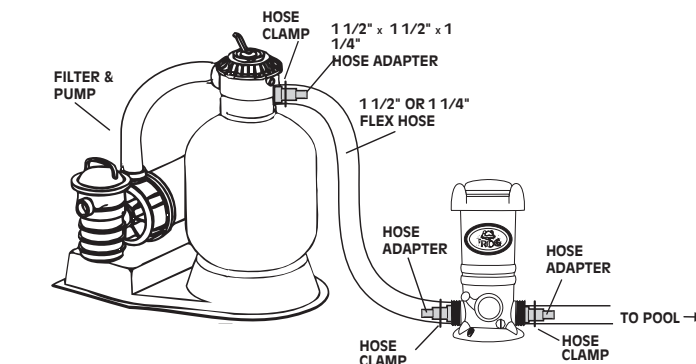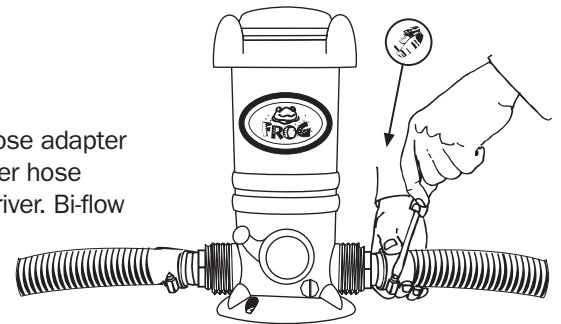

4. If using a POOL FROG® Bac Pac installing a corrosion resistant check valve is recommended.

5. For better stability, POOL FROG® Cyclizer may be mounted on a base using Phillips pan head screws. One in front and two in back.

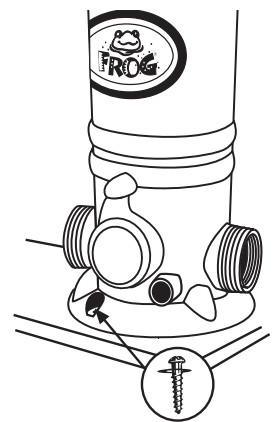

## POOL FROG® Cyclor Two-Year Limited Warranty

King Technology, Inc. warrants to the original purchaser this unit will be free from any defects in workmanship and/or material, for a period of two (2) years from the date of original purchase. This warranty covers body, cap and control dial, but specifically excludes o-rings. King Technology at its option may replace any defective parts or the entire unit without charge after it is determined what is needed to correct any deficiency. Replacement parts with the exception of o-rings are warranted for the remainder of the original warranty. To extend the limited warranty from two years to ten years, simply complete the warranty card that came with your unit and return it to King Technology within 30 days of purchase and installation.

1. To obtain warranty service, you must deliver the unit to King Technology or its nearest authorized dealer. Shipping expenses are the purchaser's responsibility. The name of the nearest authorized dealer can be obtained by writing or calling King Technology at the address and telephone number provided below. Proof of purchase is required when requesting warranty service. Purchaser must present the sales receipt or other documentation verifying proof of purchase.

2. This warranty does not cover defects caused by: Modification, alteration, repair or service of the unit contrary to the accompanying instructions; physical abuse to or misuse of the product or operation or installation in a manner contrary to the accompanying instructions. This warranty also excludes all costs arising from the installation, adjustment, removal or replacement of defective units or parts. This warranty also excludes any and all claims arising out of the chemicals used in the product or their characteristics.

**3. CAUTION - Read carefully – Failure to follow these instructions will void the warranty. Do not add shock in or near skimmer.**

**A. This unit is not designed for shock treatment of pools. See your pool dealer or distributor for further information concerning shock treatments.**

**B. Control dial settings higher than needed can result in excess sanitizers being discharged into the pool. If the sanitizer level goes unmonitored, it can result in bleaching or discoloration of areas around the pool inlet or in some cases bleaching or discoloration of the entire pool liner or paint.**

**C. Excess trichlor in the pool can create health hazards to bathers. Consult each chemical manufacturer's warnings and cautions for specifics.**

**D. Misuse or failure to use the proper POOL FROG® Mineral Reservoir and POOL FROG® Bac Pac may cause damage to equipment or personal injury. This warranty will be null and void, if this unit is not used with the recommended POOL FROG® Mineral Reservoir and POOL FROG® Bac Pac.**

4. This warranty is the exclusive warranty for the POOL FROG® Cyclor. This warranty is not transferable. **KING TECHNOLOGY MAKES NO REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, AS TO MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR ANY OTHER MATTER CONCERNING THE POOL FROG® CYCLER.** Any express warranty not provided herein, and any remedy for breach of contract but which for this provision might arise by implication or operation of law is hereby excluded and disclaimed. THE EXCLUSIVE REMEDY FOR ANY CUSTOMER IS THE REPAIR OR REPLACEMENT OF THE UNIT, AND THE RECOVERY OF DAMAGES WILL NOT EXCEED THE PURCHASE PRICE OF THE UNIT. IN NO EVENT WILL KING TECHNOLOGY BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL, SPECIAL OR PUNITIVE DAMAGES FROM ANY CAUSE.

5. Under no circumstance shall King Technology be liable to purchaser or any other person for any damage or loss incurred because of any chemicals used in the product or their physical characteristics, or interruption of service of the product, or any resulting special, incidental or consequential damages or losses. Some states do not allow the exclusion or limitation of incidental consequential damages, so the above limitation or exclusion may not apply to you.

**Manufactured by: KING TECHNOLOGY, INC.**

530 11th Avenue South, Hopkins, MN 55343 U.S.A.  
952-933-6118 • 800-222-0169 • FAX 952-933-2206  
www.kingtechnology.com

**Made in U.S.A.**

Covered by one or more of the following U.S. Patent Numbers: 4,662,387; 5,076,315; 5,218,983; 6,210,566; 6,217,892; 6,383,507; 6,544,415; 6,551,609; 6,652,871; D540,906; D551,971 and other U.S. and Foreign Patents Pending.

