


The Step

by Access



1

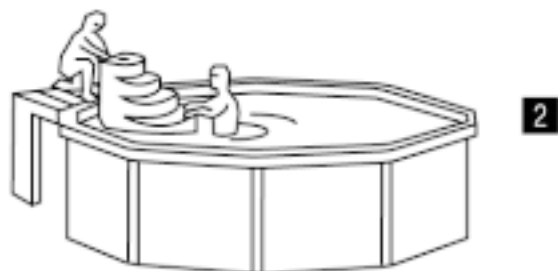


2



3

Included Hardware

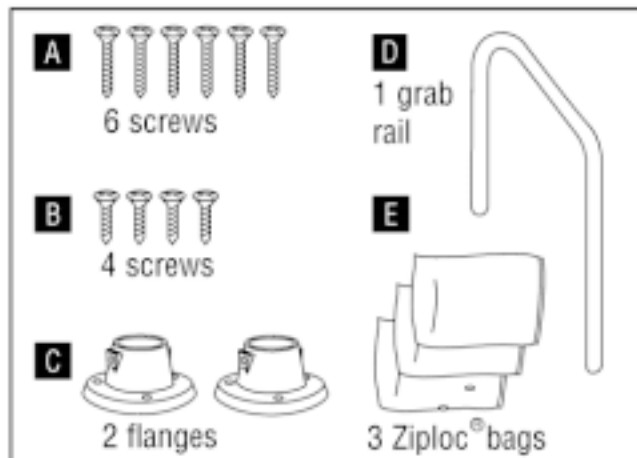

Required: 3 filtration 50 lb sand bags

INSTALLATION

Fix one of the two flanges C on the first level of *The Step*.

Place *The Step* on the edge of the pool, illustration # 1.

IMPORTANT: Slide sand bags into the Ziploc[®] pockets and get ALL air out before sealing.

Place the Ziploc[®] bags into *The Step* as per diagram.



Pull *The Step* gently into the pool, submerge it slowly, illustration # 2.

IMPORTANT: Keep *The Step* submerged during 3 to 5 minutes to let ALL air out.

Lift *The Step* into position and at the required angle, illustration # 3.

Fix the grab rail on *The Step*, adjust the position of the other flange C on the deck, illustration # 3.

Fix the other flange C on deck, illustration # 3. With a nail mark position before drilling, remove grab rail, drill the holes and install grab rail with screws (B).



N.B.: When installation is complete, the back of *The Step* should be 1" from the pool wall.



WARNING:

The Step IS DESIGNED FOR IN-POOL USE ONLY.

To avoid algae buildup, it is recommended to run the hose through the circulation openings.

The manufacturer is not responsible for damages that may result from improper installation.

In regions subject to freezing, it is recommended to remove *The Step* from water.

The Step can be stored outside at any temperature. Should be covered to keep it clean.

Don't forget!
Be careful with electric tools, use in dry area.