

Warrior™ D.E. Filter System Owner's Manual

IMPORTANT SAFETY INSTRUCTIONS
READ AND FOLLOW ALL INSTRUCTIONS
SAVE THESE INSTRUCTIONS

Table of Contents

SECTION I.	PUMP SAFETY INSTRUCTIONS	2
SECTION II.	HOW YOUR FILTER WORKS	3
SECTION III.	CHECK VALVE INSTALLATION INSTRUCTIONS	4
SECTION IV.	INSTALLATION	5
SECTION V.	INITIAL START-UP AND RESTART INSTRUCTIONS	6
SECTION VI.	CLEANING THE FILTER.	7
SECTION VII.	WINTERIZING THE FILTER	8
SECTION VIII.	CLEANING THE HIGH FLOW™ MANUAL AIR RELIEF VALVE	9
SECTION IX.	TROUBLE SHOOTING.	10
SECTION X.	PUMP INSTRUCTIONS	10
SECTION XI.	TECHNICAL DATA	12
	A. WARRIOR D.E. FILTER SYSTEM TANK ASSY.	12
	B. MAXIM PUMP ASSY.	13

WARNING

Before installing this product, read and follow all warning notices and instructions accompanying this filter. Failure to follow safety warnings and instructions can result in severe injury, death, or property damage. Call (800) 831-7133 for additional free copies of these instructions.

Pentair Pool Products

1620 Hawkins Ave., Sanford, NC • (919) 774-4151
10951 W. Los Angeles Ave., Moorpark, CA 93021 • (805) 523-2400



SECTION I. PUMP SAFETY INSTRUCTIONS

When installing and using this electrical equipment, basic safety precautions should always be followed, including the following:

1. READ AND FOLLOW ALL INSTRUCTIONS.
2. WARNING - To reduce the risk of injury, do not permit children to use this product unless they are closely supervised at all times.
3. WARNING - Risk of Electrical Shock. Connect only to a grounding type receptacle protected by a ground-fault circuit-interrupter (GFCI). Contact a qualified electrician if you cannot verify that the receptacle is protected by a GFCI.
4. Do not bury the electrical cord. Locate the cord to minimize the abuse from lawn mowers, hedge trimmers, and other equipment.
5. WARNING - To reduce the risk of electric shock, replace damaged cord immediately.
6. WARNING - To reduce the risk of electrical shock, do not use an extension cord to connect unit to electric supply; provide a properly located outlet.
7. CAUTION - For continued protection against possible electric shock, this unit is to be mounted to the base in accordance with the installation instructions.
8. CAUTION - This pump is for use with storable pools only. Do not use with permanently installed pools. A storable pool is constructed so that it may be readily disassembled for storage and reassembled to its original integrity. A permanently installed pool is constructed in or on the ground or in a building such that it cannot be readily disassembled for storage.
9. SAVE THESE INSTRUCTIONS.

 WARNING	
	To reduce the risk of electrical shock, Only connect to a GFCI protected receptacle. Failure to do so could result in an electrical shock to pool users, installers, or others which can result in serious personal injury or death.

WARNING



THIS FILTER OPERATES UNDER HIGH PRESSURE. WHEN ANY PART OF THE CIRCULATING SYSTEM (e.g., LOCK RING, PUMP, FILTER, VALVES, ETC.) IS SERVICED, AIR CAN ENTER THE SYSTEM AND BECOME PRESSURIZED. PRESSURIZED AIR CAN CAUSE THE LID TO BE BLOWN OFF WHICH CAN RESULT IN SEVERE INJURY, DEATH, OR PROPERTY DAMAGE. TO AVOID THIS POTENTIAL HAZARD, FOLLOW THESE INSTRUCTIONS.

1. BEFORE REPOSITIONING VALVES AND BEFORE BEGINNING THE ASSEMBLY, DISASSEMBLY, OR ADJUSTMENT OF THE LOCK RING OR ANY OTHER SERVICE OF THE CIRCULATING SYSTEM: (A) TURN THE PUMP OFF AND SHUT OFF ANY AUTOMATIC CONTROLS TO ENSURE THE SYSTEM IS NOT INADVERTENTLY STARTED DURING THE SERVICING; (B) OPEN AIR RELIEF VALVE; (C) WAIT UNTIL ALL PRESSURE IS RELIEVED.
2. WHENEVER INSTALLING THE FILTER LOCK RING FOLLOW THE FILTER LOCK RING INSTALLATION INSTRUCTIONS EXACTLY.
3. ONCE SERVICE ON THE CIRCULATING SYSTEM IS COMPLETE FOLLOW SYSTEM RESTART INSTRUCTIONS EXACTLY.
4. MAINTAIN CIRCULATION SYSTEM PROPERLY. REPLACE WORN OR DAMAGED PARTS IMMEDIATELY (e.g., lock ring, pressure gauge, relief valve, O-rings, etc.).
5. BE SURE THAT THE FILTER IS PROPERLY MOUNTED AND POSITIONED ACCORDING TO INSTRUCTIONS PROVIDED.

SECTION III. CHECK VALVE INSTALLATION INSTRUCTIONS

WARNING




THIS FILTER OPERATES UNDER HIGH PRESSURE. WHEN ANY PART OF THE CIRCULATING SYSTEM (e.g., LOCK RING, PUMP, FILTER, VALVES, ETC.) IS SERVICED, AIR CAN ENTER THE SYSTEM AND BECOME PRESSURIZED. PRESSURIZED AIR CAN CAUSE THE LID TO BE BLOWN OFF WHICH CAN RESULT IN SEVERE INJURY, DEATH, OR PROPERTY DAMAGE. TO AVOID THIS POTENTIAL HAZARD, FOLLOW THESE INSTRUCTIONS.

1. BEFORE REPOSITIONING VALVES AND BEFORE BEGINNING THE ASSEMBLY, DISASSEMBLY, OR ADJUSTMENT OF THE LOCK RING OR ANY OTHER SERVICE OF THE CIRCULATING SYSTEM: (A) TURN THE PUMP OFF AND SHUT OFF ANY AUTOMATIC CONTROLS TO ENSURE THE SYSTEM IS NOT INADVERTENTLY STARTED DURING THE SERVICING; (B) OPEN AIR RELIEF VALVE; (C) WAIT UNTIL ALL PRESSURE IS RELIEVED.
2. WHENEVER INSTALLING THE FILTER LOCK RING FOLLOW THE FILTER LOCK RING INSTALLATION INSTRUCTIONS EXACTLY.
3. ONCE SERVICE ON THE CIRCULATING SYSTEM IS COMPLETE FOLLOW SYSTEM RESTART INSTRUCTIONS EXACTLY.
4. MAINTAIN CIRCULATION SYSTEM PROPERLY. REPLACE WORN OR DAMAGED PARTS IMMEDIATELY (e.g., lock ring, pressure gauge, relief valve, O-rings, etc.).
5. BE SURE THAT THE FILTER IS PROPERLY MOUNTED AND POSITIONED ACCORDING TO INSTRUCTIONS PROVIDED.

1. Turn the pump off and shut off any automatic controls to assure that the system is not inadvertently started during servicing.
2. Open the High Flow™ manual air relief valve.
3. Plug the suction line by inserting a rag into the skimmer port. If equipped with a valve close it at this time to prevent water from siphoning from the pool during servicing.
4. If possible, plug the return line to prevent siphoning. If this can not be done, disconnect the union fitting from the outlet port of the filter and quickly place the return hose into the pool.
5. Remove the drain cap to empty the water from the filter.
6. Insert the Check Valve into the outlet port approximately 3/4" to 1" deep making sure the rubber diaphragm facing outward (towards you), see Diagram 1.
7. Reconnect the return hose to the outlet port and tighten the union fitting.


8. Replace the drain cap.
9. Remove the rag from the skimmer or open the valve on the suction line.
10. If the return line was plugged, unplug it at this time.
11. With the High Flow™ manual air relief valve in the open position, start the filter pump, after a steady stream of water appears close the High Flow™ manual air relief valve.
12. Your system is now in operating order.

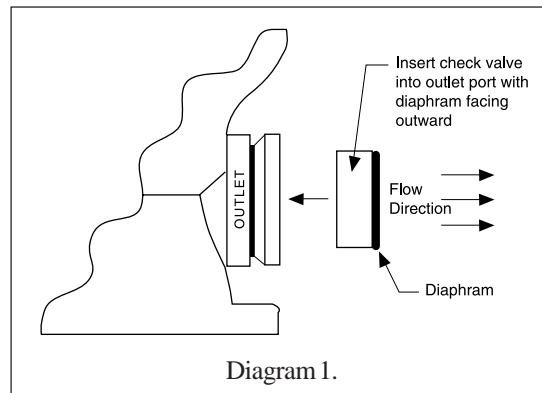


SECTION IV. INSTALLATION

To install this filter system, you will need the following tools - a screwdriver, pliers, and wrench.


1. Carefully remove the equipment from the carton and check for any evidence of damage due to rough handling or shipping. If any of the equipment is damaged, immediately notify the organization where the equipment was purchased.
2. Position a tee-nut on the boss underneath the skid base. Screw a bolt with washer into the tee-nut from the top of the base. Continue screwing the bolt into the tee-nut until the tee-nut is flush with the boss. Unscrew the bolt. Repeat procedure for the remaining bosses.
3. This filter should be mounted on a level concrete slab, preferably concrete poured in a form or on a platform constructed of concrete block or brick.
4. Depending upon how your skimmer is positioned in relationship to the return fitting, see Diagram 3, either right or left of the skimmer, position the mounting base accordingly; see Diagram 3. Position the filter tank on the mounting base so the filter **inlet** port is oriented toward the pump similar to Diagram 2. Secure the filter to the mounting base using two bolt fasteners. Place the pump on the mounting base; see Diagram 2. Loosely attach the pump connector, see Detail A, to the pump and filter. This will align the pump to the correct set of mounting holes. Secure the pump to the base using two bolt fasteners. Tighten the union fittings on the plumbing connector by hand until tight. If water leakage occurs at these connections, adjust connections with a wrench making sure not to exceed 1/4 of a turn.
5. Do not mount electrical controls (on/off switches, timer, etc.) over the filter. You need to be able to stand clear of the filter when starting the pump.

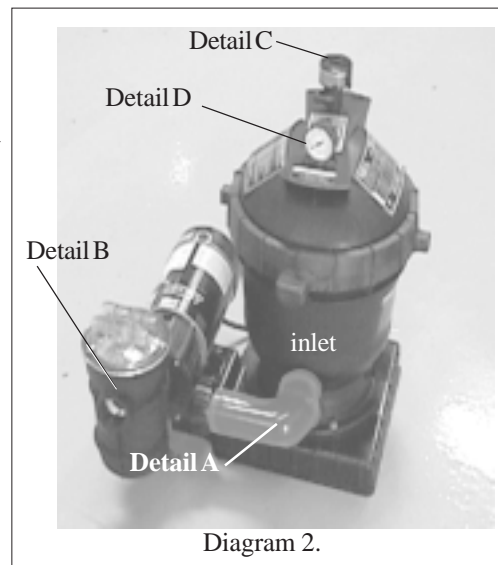

6. Attach the hair and lint pot to the front of the pump. This is an O-ring seal fitting that requires hand tightening only. (OVER TIGHTENING CAN RESULT IN DAMAGE TO THE O-RING SEAL)

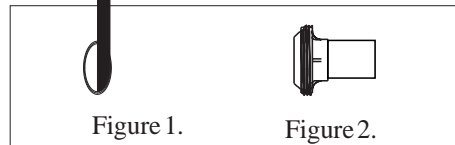


7. Install the threaded fitting, see Diagram 3 – Figure 1, into the suction port of the pump. This is an O-ring seal fitting that requires hand tightening only. (OVER TIGHTENING CAN RESULT IN DAMAGE TO THE O-RING SEAL).

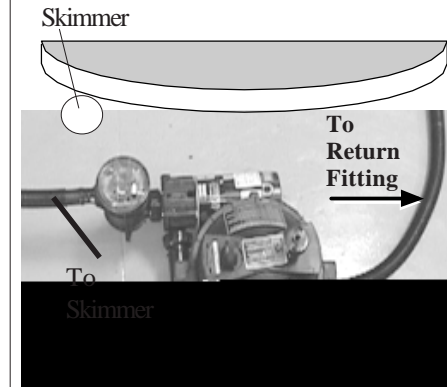

8. Install the threaded return fitting into the filter outlet port, see Diagram 3 – Figure 2, making sure that the O-ring is in place in the filter body. Tighten this connection by hand until tight. If water leakage occurs at this connection after installation, adjust connection with a wrench making sure not to exceed 1/4 of a turn. (OVER TIGHTENING CAN RESULT IN DAMAGE TO THE FILTER).

9. Connect black hoses to the equipment and the pool with the clamps provided.
 - a. Connect the skimmer suction port from the pool to the pump inlet.
 - b. Connect the filter outlet port to the return fitting of the pool, see Figure 1.
 - c. Install the High Flow™ air relief valve, see Diagram 2 – Detail C, into the top of the filter tank lid. This is an O-ring seal that requires hand tightening only.
 - d. Install the pressure gauge, see Diagram 2 – Detail D, using the Teflon tape provided. Wrap the threads of the pressure gauge with three layers. Install the gauge into the top of the filter tank until tight.

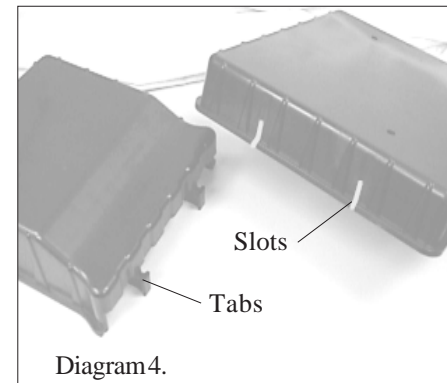

10. Never install a pump in this system that exceeds the maximum pressure of this filter, see data label.
11. If using the optional **Chlorinator Base**, knockout the two slots on the system base with a hammer and screwdriver.
12. Slide the two tabs on the Chlorinator Base into the slots on the system base; see Diagram 4.

SECTION V. INITIAL START-UP AND RESTART INSTRUCTIONS

1. Be sure all connections have been made and are secure.
2. Make sure the hair and lint pot of the pump is filled with water. (FAILURE TO FILL THE HAIR AND LINT POT WITH WATER WILL RESULT IN DAMAGE TO THE PUMP AND PUMP SEAL.)

3. OPEN THE HIGH FLOW™ MANUAL AIR RELIEF VALVE UNTIL IT SNAPS INTO THE FULL OPEN POSITION (THIS ONLY REQUIRES A 1/4 TURN COUNTER-CLOCKWISE).

4. STAND CLEAR OF THE FILTER. Start pump allowing the filter tank to fill with water. Close the High Flow™ manual air relief valve after steady stream of water appears.

DIATOMACEOUS EARTH, CHART 1			
Model No.	Rated GPM	No. of 1 lbs. Coffee Cans	Weight of Diatomite
56344xxx	44	3	1.5 lbs.
56366xxx	66	4	2 lbs.

5. COATING THE FILTER ELEMENTS WITH DIATOMACEOUS EARTH. With the pump on, introduce the recommended amount of D.E. through the skimmer (see chart below), this will precoat the element grids. A 1 lb. coffee can is equal to 1/2 lb. of D.E.; see Chart 1.


⚠ CAUTION
Do not operate filter for more than two minutes without a precoat of D.E. on the grids.

6. Your filter has now started its filter cycle. You should check that the water is returning to the pool and take note of the operating pressure. My original starting pressure is _____ psi with the filter clean.
7. Check the system for water leaks. If a leak is found, shut off pump before correcting the leak.
8. As the filter removes dirt and impurities from the pool water, the accumulation will cause the filter pressure to rise and the flow to diminish. When the pressure gauge reading is 8 to 10 psi higher than the clean filter reading noted above, it is time to clean the filter's element grids, see SECTION VI. CLEANING THE FILTER, which follows.

SECTION VI. CLEANING THE FILTER.

1. Cleaning frequency will vary from pool to pool and with other factors such as weather conditions, heavy rains, dust pollen, bather load and water chemistry. Check the pressure gauge reading on a regular basis and when the pressure gauge reading increases 8 to 10 PSI over the initial clean filter reading, it is time to clean your ELEMENT GRIDS.
2. Turn the pump off, shut off any automatic controls to assure that the system is not inadvertently started during servicing.
3. Plug the skimmer port with a rag. This will prevent water from the pool from running out during servicing.
4. Open the filter High Flow™ manual air relief valve, and the filter drain plug.
5. Remove the hair and lint strainer pot lid and clean the basket. Replace the basket and secure the lid.
6. Remove the filter lock ring by depressing the two spring loaded locking blocks and rotating the ring counter clockwise until the ring is free from the filter body.
7. Remove the filter lid using the lifting handles on the lid.

8. Remove the ELEMENT GRID assembly from the filter body by using the lifting handles and pulling straight up.
9. Using a garden hose, direct water spray at the ELEMENT GRID to dislodge and wash away any accumulated foreign matter and Diatomaceous Earth. Thoroughly clean the elements.

⚠ WARNING	
	<p>This filter operates under high pressure. When any part of the circulating system (e.g., lock ring, pump, filter, valves, etc.) is serviced, air can enter the system and become pressurized. Pressurized air can cause the lid to be blown off which can result in severe injury, death, or property damage.</p>

10. Clean and remove debris from the inside of the filter tank.
11. Replace the ELEMENT GRID ASSEMBLY into the filter tank body making sure the arrow on the top of the center core is aligned with the filter in the port. You will be able to feel the assembly drop into and lock into place when in the proper position.
12. Clean any debris from the O-ring at the top of the filter tank. Apply a silicone lubricant to the O-ring.
DO NOT USE A PETROLEUM-BASE LUBRICANT ON THE O-RING.
Failure to properly clean and lubricate the O-ring may result in water leakage.
13. Replace the filter tank lid making sure it is fully and firmly seated on the tank body.
14. Place the filter lock ring over the filter lid, and turn clockwise until the safety latches click and the lock ring hits the stops on the body.
DO NOT ATTEMPT TO OVER TIGHTEN THE FILTER LOCK RING AFTER THE SAFETY LATCHES HAVE ENGAGED. WARNING! IF THE FILTER LOCK RING IS DAMAGED, REPLACE IT IMMEDIATELY.
15. Replace the drain cap hand tight only.
16. Follow Instructions in SECTION IV. INITIAL START-UP AND RESTART

SECTION VII. WINTERIZING THE FILTER

1. In areas that have freezing winter temperatures, the pool equipment must be winterized to protect it from damage.
2. With the pump turned off, open the High Flow™ manual air relief valve.
3. Remove the drain port cap, and allow the filter to drain completely.

4. Remove the drain port plugs on the pump and allow the pump to drain completely.
5. Drain all appropriate system piping.


WARNING

Failure to operate your filter system or inadequate filtration can cause poor water clarity obstructing visibility in your pool. Poor water clarity may obscure objects in the water which while swimming and diving could cause severe personal injury and death. Never swim in a pool with poor water clarity.

6. It is recommended that the pump and filter be covered with a tarpaulin or plastic sheet to inhibit deterioration from the weather.
DO NOT WRAP THE PUMP MOTOR WITH PLASTIC.
7. Your filter system is now winterized.
8. See SECTION IV. INITIAL START-UP AND SYSTEM RESTART INSTRUCTIONS, when pool is ready to be opened for the season.

SECTION VIII. CLEANING THE HIGH FLOW™ MANUAL AIR RELIEF VALVE

1. Turn the pump off and shut off any automatic controls to ensure that the system is not inadvertently started during servicing.
2. **OPEN THE HIGH FLOW™ MANUAL AIR RELIEF VALVE UNTIL IT SNAPS INTO THE FULL OPEN POSITION, THEN WAIT UNTIL ALL PRESSURE IS RELIEVED.**
3. With the relief valve attached to the filter tank, pull out the locking tabs and remove the valve stem and cover assembly with a counter clockwise and lifting motion, see Diagram 5.
4. Clean the debris from the valve stem and body. Verify that the filter tank's air passage is opened by inserting a 5/16" drill bit through the valve body. Verify that the O-rings are in good condition, properly positioned, and lubricated with a silicone base lubricant.
5. Reinstall the valve stem and cover assembly with a downward and clockwise motion until it snaps into position.

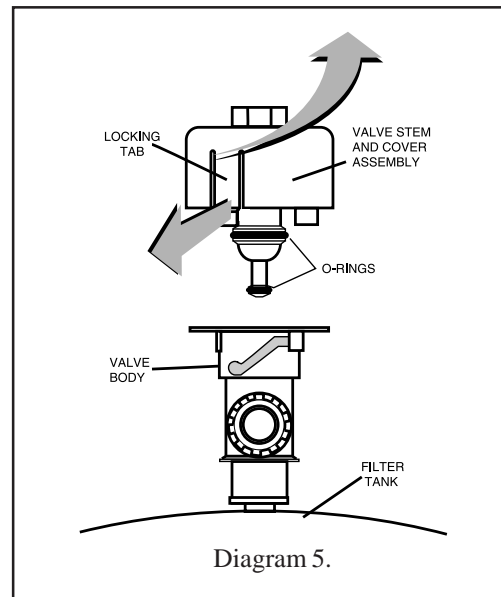

SECTION IX. TROUBLESHOOTING

Problem	Cause	Remedy
Pool water not sufficiently clean.	1. Pool chemistry not adequate to inhibit algae growth.	Maintain pool chemistry or consult pool service technician.
	2. Inadequate turnover rate.	Run system for longer time or consult dealer or pool service technician.
Higher filter pressure.	1. Insufficient cleaning of the filter element.	Clean the filter element, see SECTION V. CLEANING THE FILTER.
	2. Partially closed valve or restriction.	Open valve or remove obstruction in return line.
Short filter cycles.	1. Insufficient cleaning of filter element.	Clean the filter element, see SECTION V. CLEANING THE FILTER.
	2. Pool chemistry not adequate to inhibit algae growth.	Maintain pool chemistry or consult pool service technician.
	3. Flow rate too high.	Restrict flow to capacity of filter.
Return flow to pool diminished, low filter pressure.	1. Obstruction in the pump hair and lint pot.	Clean basket in strainer.
	2. Obstruction in pump.	Disassemble and clean pump.
	3. Obstruction in suction line to pump.	Clean skimmer basket. Remove obstruction in lines. Open valves in suction line.

 WARNING	
	To reduce the risk of electrical shock, Only connect to a GFCI protected receptacle. Failure to do so could result in an electrical shock to pool users, installers, or others which can result in serious personal injury or death.

SECTION X. PUMP INSTRUCTIONS

1. TO PRIME PUMP - (pump must be off).

Unscrew the lid from the pot and fill the pot with water to level of the suction line. Inspect O-ring, lubricate with silicone lubricant. Screw the lid into the pot, hand tighten, lid shoulder will come to rest on the pot surface. Turn the pump on, priming time will vary depending upon elevation above water level and horizontal distance of suction line. If the filter is installed, open the High Flow™ manual air relief valve (before turning the pump on) until a steady stream of water comes out, then close the High Flow™ manual air relief valve. The pump is now primed. If the pump is installed below water level, close the return line prior to filling the hair and lint pot with water. Line must be re-opened before turning the pump on.

2. TO CLEAN BASKET - (pump must be off).

Follow the instructions above to prime the pump. After removing the lid, remove the basket and empty the debris. Replace the basket and proceed to fill the pot with water. It is important to visually inspect the basket, through the see through lid, at least once a week. A dirty basket will reduce the efficiency of your system, and can put an abnormal load on the pump which could result in costly repair bills.

 **CAUTION**

DO NOT RUN PUMP DRY. If the pump is run dry, the mechanical seal will be damaged and external leakage will occur. When a seal is damaged, the seal must be replaced.

 **CAUTION**

ALWAYS MAINTAIN PROPER WATER LEVEL IN THE POOL. Water level must be half way up the skimmer opening. A low water level can cause the pump motor to run dry which will damage the mechanical seal and cause external leakage.

3. SHAFT SEAL - (rotary seal). The shaft seal consists of two parts:

- a. Rotating ceramic seal, press fitted into the impeller.

 **CAUTION**

The highly polished and lapped faces of the seal are easily damaged. Handle with care. This centrifugal pump requires little or no service, however the shaft seal will wear with normal use over the years and will require periodic replacement.


- b. A stationary spring loaded seal, press fitted into the rear of the volute.

4. THE ELECTRIC MOTOR.

- a. The electric motor should be protected from foreign matter, water splashing, hosing, and the weather. Enclosures should be well ventilated to prevent overheating. If a motor becomes wet, permit it to dry before running it. If a motor has been damaged by water or dirt, the warranty is void.
- b. The motors used on these pumps are 48 frame through bolt motors. The through bolts are used to secure the volute to the motor. When replacing the motor, mark the end bells and the motor shell to indicate alignment. Remove the four nuts from the through bolts at the shaft end. Place the shaft through the back of the volute and locate the bolts in line with the brass inserts located in the four legs at the rear of the volute. Be sure the end bell and the shell marking line up. Securely fasten the motor to the volute.
- c. Protect the motor from heat. Provide ample ventilation.

SECTION TECHNICAL

A. WATER TREATMENT

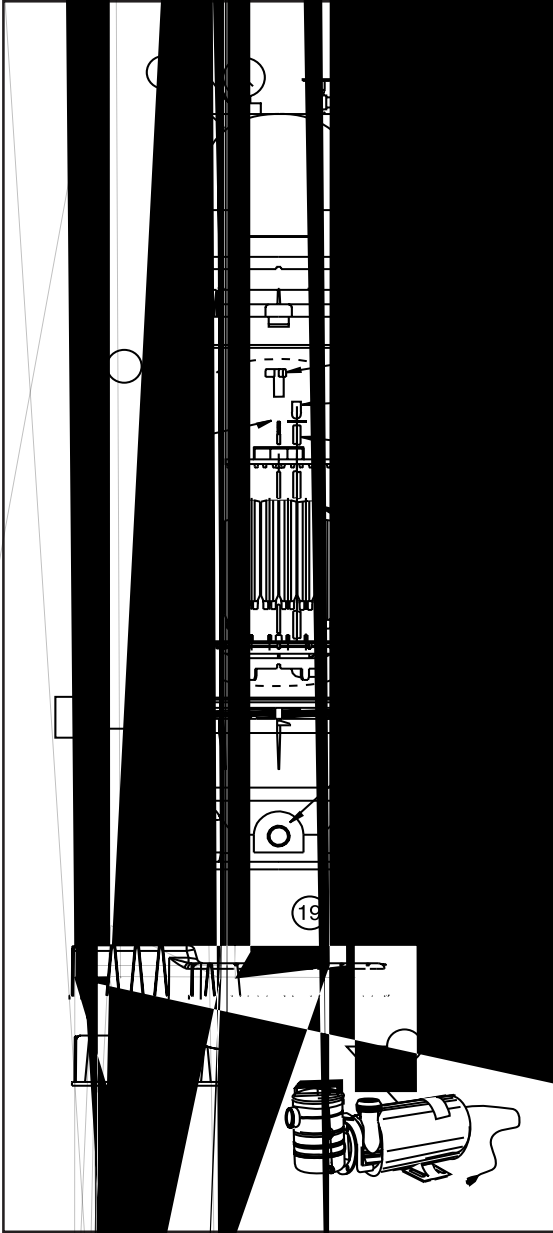


P/N 997

12

REV E. 6-8-01

SECTION X. TECHNICAL DATA (continued)

B. MAXIMPUMP ASSY.

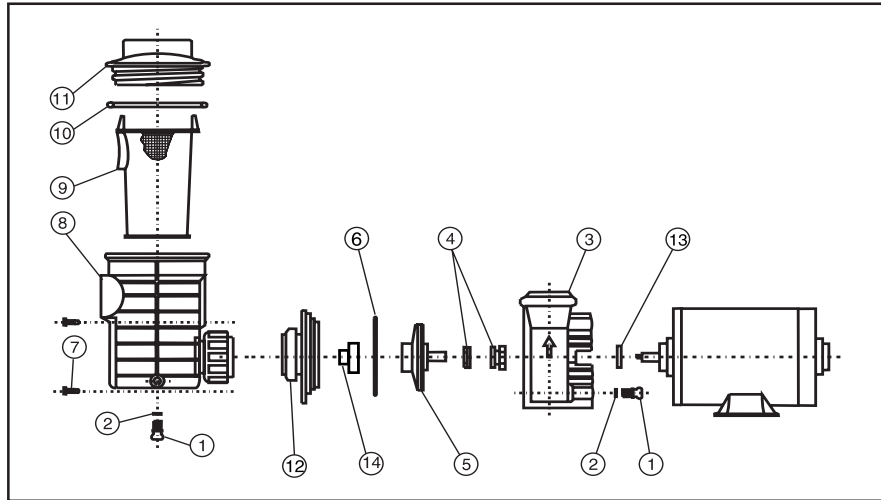

Replacement Parts

Item No.	Part No.	Description	Item No.	Part No.	Description
1	98206400	Plug, ¼ in. with O-ring	10	39101900	O-ring
2	57006500	O-ring	11	39101100	Lid, clear
3	39102503	Volute, S Series, vertical	11	39101199	Lid, baquacil resistant
4	39701200	Seal, shaft	12	39502500	Face plate side
5	39104600	Impeller, ½ hp	13	39102100	Slinger
5	39153100	Impeller, ¾ hp	14	39701800	Weir ring
5	39153200	Impeller, 1 hp		39102300	Body, Swivel Union
5	39153400	Impeller, 1½ hp		39102400	Nut, Swivel Union
5	39153500	Impeller, 2 hp			
5	39153100	Impeller, ½ hp, 50 cycle			
5	39153200	Impeller, ¾ hp, 50 cycle			
5	39153300	Impeller, 1 hp, 50 cycle			
5	39153400	Impeller, 1½ hp, 50 cycle			
6	39101500	O-ring, volute			
7	98210400	Screw, faceplate, 8-32 x 5/8 in., S Series			
	98215000	No.10 lock washer, internal star			
	98215200	Nut, hex, 10-24 Maxim pump			
8	39106800	Pot, Union Nut, face plate, weir ring assembly			
9	39101200	Basket			

SAVE THESE INSTRUCTIONS.

Warrior Vertical Grid D.E. Filter Pentair Pool Products Limited Warranty

PENTAIR POOL PRODUCTS manufactures its Warrior Vertical Grid D.E. Filter under high standards of workmanship and with high quality materials. Accordingly, Pentair Pool Products expressly warrants this filter model as follows:

WARRANTY COVERAGE - All internal components of Pentair Pool Products Warrior filters (except cloth materials whether synthetic or natural) which are actually manufactured by Pentair Pool Products are warranted to be free from defects in material and/or workmanship for a period of three (3) years from date of purchase. In addition, the tanks of such filters are warranted to be free from defects in material and/or workmanship for a period of ten (10) years from date of purchase. The obligation of Pentair Pool Products under this warranty will be limited to either repair or replacement of the filter tank, at Pentair Pool Products option.

EXCLUSIONS FROM THIS WARRANTY - This warranty does not cover:

1. Any cloth materials, synthetic or natural, contained in the filter.
2. Any item manufactured by other companies and installed by Pentair Pool Products (such as air or water valves, gauges, plumbing, fittings, pipes, bolts, nuts, cartridges, etc.).
3. Problems resulting from oversizing of pump and/or reduction of valve piping size, or from failure to turn pump off before changing the position of the filter valve or any operating valves for the pool and its accessories.
4. Problems resulting from failure to comply with instructions contained in the Operating Instructions sheet.
5. Problems resulting from abuse, misuse, negligence or accident by any party other than Pentair Pool Products.
6. Problems resulting in whole or in part from alteration or modification of the filter by any party.
7. Failures due to chemical corrosion caused by failure to maintain the water chemistry in conformity with the standard of the swimming pool and spa industry.

WARRANTY OBLIGATIONS OF PENTAIR POOL PRODUCTS - Should a defect in workmanship and/or material in any item covered by this warranty become evident during the term of the warranty, then upon the consumer following the procedures set forth which follow, Pentair Pool Products will, at its option, repair or replace such item or part at its own cost and

expense. Pentair Pool Products is not, however, responsible under this warranty for any cost of shipping or transportation of the filter or part thereof to or from the Service Department. Also, Pentair Pool Products is not liable for any loss of time, inconvenience, incidental expenses such as telephone calls, labor or material charges incurred in connection with the removal or replacement of the equipment, or any other incidental or consequential damages.

PLEASE NOTE - Some states do not allow the exclusion or limitation or incidental or consequential damages, so the above limitation or exclusion may not apply to you.

PROCEDURE FOR OBTAINING PERFORMANCE - In order to obtain the benefits of this warranty the consumer who made the original retail purchase will contact Pentair Pool Products, Customer Service Department, 10951 West Los Angeles Ave., Moorpark, CA 93021 as soon as possible after discovery of the defect, but in no event later than the expiration date of the warranty period provided in this warranty. Upon receipt of this communication, Pentair Pool Products will promptly notify the customer of the address to which the defective item may be shipped. The customer shall then ship the item, freight prepaid, to the address indicated together with a letter stating the model number, serial number, and the date of purchase of the item which is claimed to be defective, and the name and address of the consumer and a brief description of the problems encountered.

WARRANTY PROTECTS ORIGINAL PURCHASER - This warranty extends to the consumer who made the original retail purchase only and is not enforceable by any other party.

WARRANTIES OR REPRESENTATIONS BY OTHERS - No dealer or other person has any authority to make any warranties or representations concerning Pentair Pool Products or its products. Accordingly, Pentair Pool Products is not responsible for any such warranties or representations.

OTHER RIGHTS - This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

Pentair Pool Products

1620 Hawkins Ave., Sanford, NC • (919) 774-4151
10951 W. Los Angeles Ave., Moorpark, CA 93021 • (805) 523-2400

