




Lite2 Heaters

Value you can rely on...

Lite2 Heaters

With over 50 years experience as the #1 selling brand of pool heaters—Jandy has a heater designed for every application. Reliability and performance year after year, season after season—whichever model you select is sure to provide years of dependable service.


DESIGNED TO SAVE ENERGY



Ceramic fiber combustion chamber for lightweight, compact design.



Copper heat exchanger and Flo-Thru™ baffles provide efficient heat transfer and lower the amount of energy needed to heat your pool.



Reliable, self cleaning hot surface ignition systems provide trouble free operation on LD and LJ models season after season.

THREE MODELS TO CHOOSE FROM:

The Lite2 LJ



Liquid crystal digital display features options that include pump control, dual temperature control,

built-in freeze protection and advanced heater diagnostics.

The Lite2 LD



Is easy to operate, providing separate controls for pool and spa.

The Lite2 LG



Keeps it simple with an easy on/off switch and a single temperature control for pool water temperature maintenance.

Efficiency You Can Depend On



Performance you can rely on... with Jandy Technology inside

Lite2 Heaters



Jandy's Expertise and design know-how are reflected in the technologically advanced Lite2 LJ heater. The LJ makes life around the pool more enjoyable with its programmable features.



LITE2 PERFORMANCE CHARTS

The Pool Sizing Guide below shows the maximum pool surface area the our Lite2 models will heat based on the Temperature Difference* between the air temperature during the coldest month the pool is used and the desired pool temperature. Figures are based on average wind conditions and average pool depth.

POOL SIZING GUIDE

Model	125	175	250	325	400					
Temp Difference*	Maximum Area Heater (width x length)									
	0 Wind	3 1/2 MPH	0 Wind	3 1/2 MPH	0 Wind	3 1/2 MPH	0 Wind	3 1/2 MPH	0 Wind	3 1/2 MPH
15°F	675	875	925	1250	1325	1775	1725	2300	2125	2850
20°F	500	675	700	925	1000	1325	1300	1725	1600	2125
25°F	400	525	550	750	800	1075	1050	1400	1300	1700
30°F	325	450	475	625	700	900	875	1550	1075	1425
35°F	300	400	400	550	575	775	750	1000	900	1225


The Spa Sizing Guide below details the time required for each model to raise spa temperature by 30°F.

SPA SIZING GUIDE

Model	125	175	250	325	400
Spa Size	Time Required to Raise Temp 30°				
200 Gallons	30 Minutes	25 Minutes	20 Minutes	15 Minutes	10 Minutes
400 Gallons	60 Minutes	45 Minutes	30 Minutes	25 Minutes	20 Minutes
600 Gallons	90 Minutes	65 Minutes	45 Minutes	35 Minutes	30 Minutes
800 Gallons	120 Minutes	90 Minutes	60 Minutes	50 Minutes	40 Minutes
1000 Gallons	150 Minutes	110 Minutes	75 Minutes	60 Minutes	50 Minutes

Specifications:

LD LG LJ	BTHU Input 1000's (kcal)	"W" Width Inches (cm)	"V" Vent Diameter Inches (cm)	"H" Outdoor Stack Inches (cm)	"H" Indoor Stack Inches (cm)	Weight lbs (kgs)
125	125 (31.5)	15 (38.0)	5 (12.7)	9 1/8 (23)	16 1/4 (41.3)	148 (67)
175	175 (44.1)	18 (45.7)	6 (15.2)	9 3/4 (24)	24 1/8 (61.3)	175 (79)
250	250 (63.0)	22 1/2 (57.2)	7 (17.8)	10 (26)	25 1/4 (64.1)	182 (83)
325	325 (81.9)	26 3/4 (67.9)	8 (20.3)	10 5/8 (27)	26 1/2 (67.3)	214 (97)
400	400 (101.0)	31 3/4 (80.6)	9 (22.9)	13 1/4 (34)	27 1/2 (69.9)	228 (103)

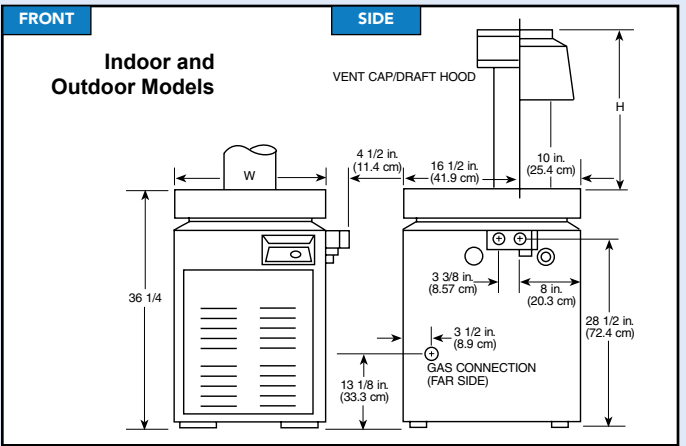

See you Jandy Sales Representative
for more information!



ALL JANDY PRODUCTS WORK SEAMLESSLY TOGETHER

Jandy Control Systems manage our complete line of technologically advanced products.



Pumps • Filters • Heaters • Air Energy Heat Pumps
Controls • Lights • Water Purification Systems • Valves
Water Features • Cleaners • Accessories

