


So clean. So clear. So easy.

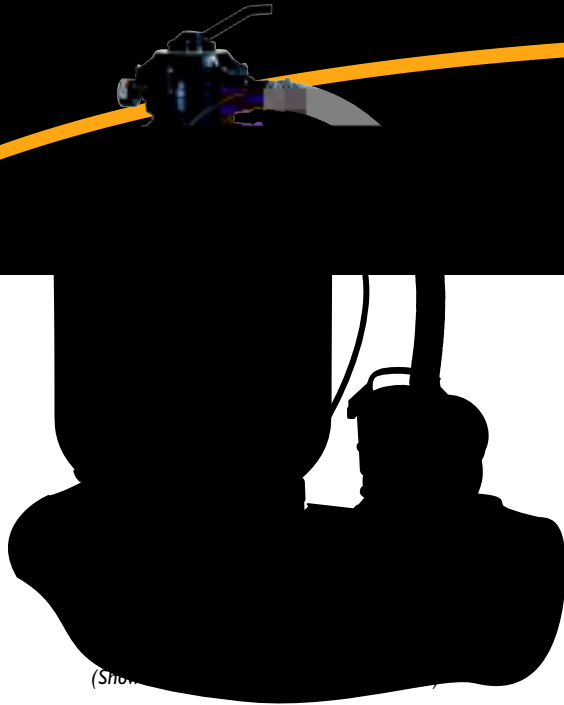

...and power and operating economy of the Dynamo pump. The result is a harmoniously engineered aboveground pool filter system that provides the reliability of perfectly matched components.

The Sand Dollar sand filter system is the high performance sand filter for aboveground pools. With its rugged construction, highly efficient design, and hydraulically matched Dynamo pump, it will provide all the clean, crystal clear water your pool requires. Plus, it's incredibly simple to operate and maintain, and built with long-term reliability in mind. The Sand Dollar sand filter is available in three sizes to meet a range of aboveground pool filtering requirements.

**Standard features include:**

- Filter's special internal design keeps sand bed level for consistent performance and extended filter cycles.
- One piece thermoplastic filter tank for exceptional strength, corrosion resistance, and long life.



# Sand Dollar™

Sand Filter System

## Engineered for simple operation

Pool filter operation doesn't come any easier. The Sand Dollar's Hi-Flow™ valve puts all filter functions right at your fingertips—just rotate the handle to the desired position and Sand Dollar does the rest for sure and simple operation.

### Other features include:

- 6-function 1½" multiport valve features pressure gauge and manual air relief for optimum filtration efficiency.
- Combination water and sand drain makes servicing and winterizing fast and easy.
- Internal design of filter ensures that water is exposed to maximum surface area of sand for optimum filtration performance and efficient backwashing.
- System is designed for quiet, energy efficient performance.
- System includes light-ready, directional water return fitting for convenient and economical upgrade of AquaLuminator™ lighting. (Part # 619398)
- Ten-year filter tank warranty. See warranty for details.



(AquaLuminator)



## Sand Dollar Top Mount—Sand Filter

Model Number	Filter Area Sq. Ft.	Vertical* Clearance	Filter Diameter	Required Sand† (lbs.)	Flow Rate GPM	Turnover Capacity (Gallons)		
					Res.**	6hrs.	8hrs.	12hrs.
SD 35	1.4	36.75"	16"	100	35	12,600	16,800	25,200
SD 40	1.8	46"	19"	150	40	14,400	19,200	28,800
SD 60	2.3	50.5"	22"	250	60	21,600	28,800	43,200

\*Required clearance to remove the valve  
 \*\*Maximum flow rate  
 †Use standard #20 silica sand

Ask your Pool Professional about Pentair's comfort and convenience options to add a whole new dimension to your pool living:

- ✦ automatic sanitizers
- ✦ heaters
- ✦ automatic cleaners
- ✦ lighting

 **Pentair**  
 Pool Products™

Because *reliability* matters most

33 • Fax: 800-284-4151 • www.pentairpool.com

